

#### SERVICES PROVIDED BY GCI

- Owner's Authorized Representative (OAR)
- Design Management and Review
- Project Management (PM)
- Construction Inspection & Closeout




#### MAIN PROJECT ELEMENTS

- Removal of cap metal and deteriorated wood blocking
- New roof system between skylights
- Resealing of all skylights
- Resealing of gutters between skylight sections

## ORLANDO INTERNATIONAL AIRPORT R-078, East Checkpoint Skylight Renovations

This project renovated the skylight over the East Security Checkpoint at the Orlando International Airport. Work included replacement of the existing skylight flashing, coping, sealants and the single-ply membrane roofing between the eighteen (18) skylight runs consisting of thirty (30) skylight panels per run.

Included in the scope of this project were shop-fabricated roof drain strainers, vulcanized rubber covers over joints, a liquid-applied waterproof coating inside the gutter troughs, and the repainting of tubular steel main support structures over the skylight. The project's daily work activities were closely coordinated with the Hyatt Hotel due to the close proximity to numerous Hyatt guest rooms.

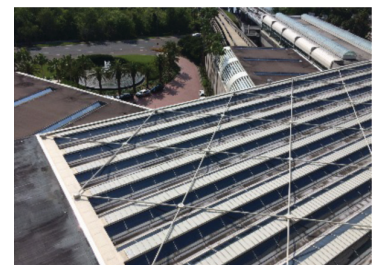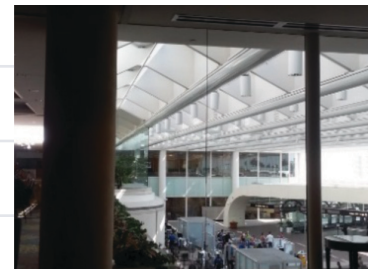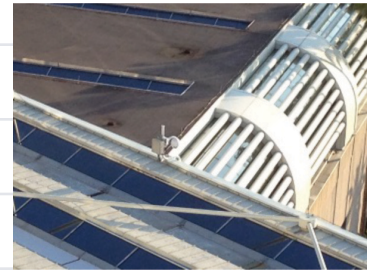

**CONSTRUCTION COST: \$999,000.00**  
**COMPLETION DATE: May 2014**